


BODY TYPE: EXTRUDED ALUMINUM
TANK TYPE: DRY SIDE

DOC. NO. : E018-1 DRAWING TEMPLATE
REV. B 2008/01/09

SPECIFICATION

- CHASSIS:**
-FREIGHTLINER M2 106, REGULAR CAB SBA
-39,000 LB GVWR; 12,000 LB FRONT / 27,000 LB REAR
-DIESEL ENGINE, CUMMINS ISL, 350 HP
-AUTOMATIC TRANSMISSION, ALLISON 3000 EVS
- PUMP:**
-DARLY LDM1250 MIDSHIP
-1250 USGPM (5000 LPM) (1050 IGPM) AT 150 PSI
-NFPA TEST AND CERTIFICATION TO NFPA 1901-2009 EDITION
- PLUMBING: GALVANIZED SCHEDULE 40**
- 2 x 6" SUCTION GATED WITH RELIEF VALVE-ELECTRIC
- 2 x 2 1/2" GATED SUCTION, (1)ROAD (1)CURB
- 3 x 2 1/2" DISCHARGE PORT, (2)ROAD (1)CURB
- 2 x 1 1/2" SPEED LAY'S
- 1 x 4" STORZ DISCHARGE, 3" PLUMBING (1)CURB
- 1 x 3" MONITOR STANDPIPE
- 4" TANK TO PUMP, W/3" AKRON BALL VALVE
- 2" TANK FILL
- TANK:**
-1000 IG (1200 USG) POLY
- BODY:**
-MXV FLAT BACK ALUMINUM HIGH/MED
-BODY UNDERCOATING - CORASHIELD
- EMERGENCY EQUIPMENT-ACCESSORIES:**
- LIGHT BAR 53" LED
- SIREN SMART
- 100W SPEAKER
- 1 x FLOOD LIGHT
- 1 x HAND HELD SPOT LIGHT IN CAB
- 2 x GRILLE LIGHTS RED
- 4 x INTERSECTION LIGHTS RED
- 2 x SIDE UPPER WARNING LIGHTS RED 9x7
- 2 x REAR LWR WARNING LIGHTS RED
- 4 x REAR UPR WARNING LIGHTS RED
- 4 x SCENE LIGHTS
- 10 x GROUND LIGHTS
- AIR CHARGING PROVISION
- BATTERY CHARGING PROVISION
- ANTENNA MOUNT
- 10' FOLDING LADDER
- 14' ROOF LADDER
- 24' (2)SECTION EXTENSION LADDER
- (2) 6" x 10' SUCTION HOSE
- (1) 6" LOW LEVEL KOCHERK STRAINER
- (1)6', (1)8', (1)10' PIKE POLE
- MODEL:**
FSC LEGEND LPX53"
FSC PLATINUM W/MIC
FSC ES100
UNITY AG-2
COLLINS
FSC QUADRAFLARE
FSC QUADRAFLARE
FSC QUADRAFLARE
FSC QUADRAFLARE
FSC QUADRAFLARE
FRC LED900-Q70
LUMA BAR H20-20"
KUSSMAUL PUMP
PLUS 1000
DUO-SAFETY 585-A
DUO-SAFETY 775-A
DUO-SAFETY 900-A
- | COMPT. | COMPARTMENT FRAME DIMENSIONS |
|--------|------------------------------|
| L1 | 36W x 65H x 13.5/26D |
| L2 | 60W x 35H x 13.5D |
| L3 | 36W x 65H x 13.5/26D |
| R1 | 36W x 48H x 13.5/26D |
| R2 | 60W x 18H x 13.5D |
| R3 | 36W x 48H x 13.5/26D |
| B1 | 46W x 62H x 28D |
- DOOR OPENING/COMPARTMENT SIZE:**
PAN DOORS
SINGLE DOOR CONFIGURATION:
DOOR OPENING IS REDUCED 2" IN HEIGHT AND 2" IN WIDTH AND 3" IN DEPTH.
DOUBLE DOOR CONFIGURATION:
DOOR OPENING IS REDUCED 2" IN HEIGHT AND 4" IN WIDTH AND 3" IN DEPTH.
ROLLUP DOORS
DOOR OPENING IS REDUCED 10" IN HEIGHT AND 2" IN WIDTH AND 2" IN DEPTH.
- **PUMP RATING & TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. ACTUAL VALUES MAY VARY.****
****CHASSIS GVWR IS MINIMUM REQUIRED FOR STANDARD BODY. DEPENDING ON OPTIONS GVWR MAY INCREASE****
****OEM CAB STEPS MAY NOT MEET NFPA STANDARDS. SELECT CUSTOM STEPS IF REQUIRED.****
****DRAWING MAY NOT BE EXACT, SEE QUOTE FOR DETAILS.****

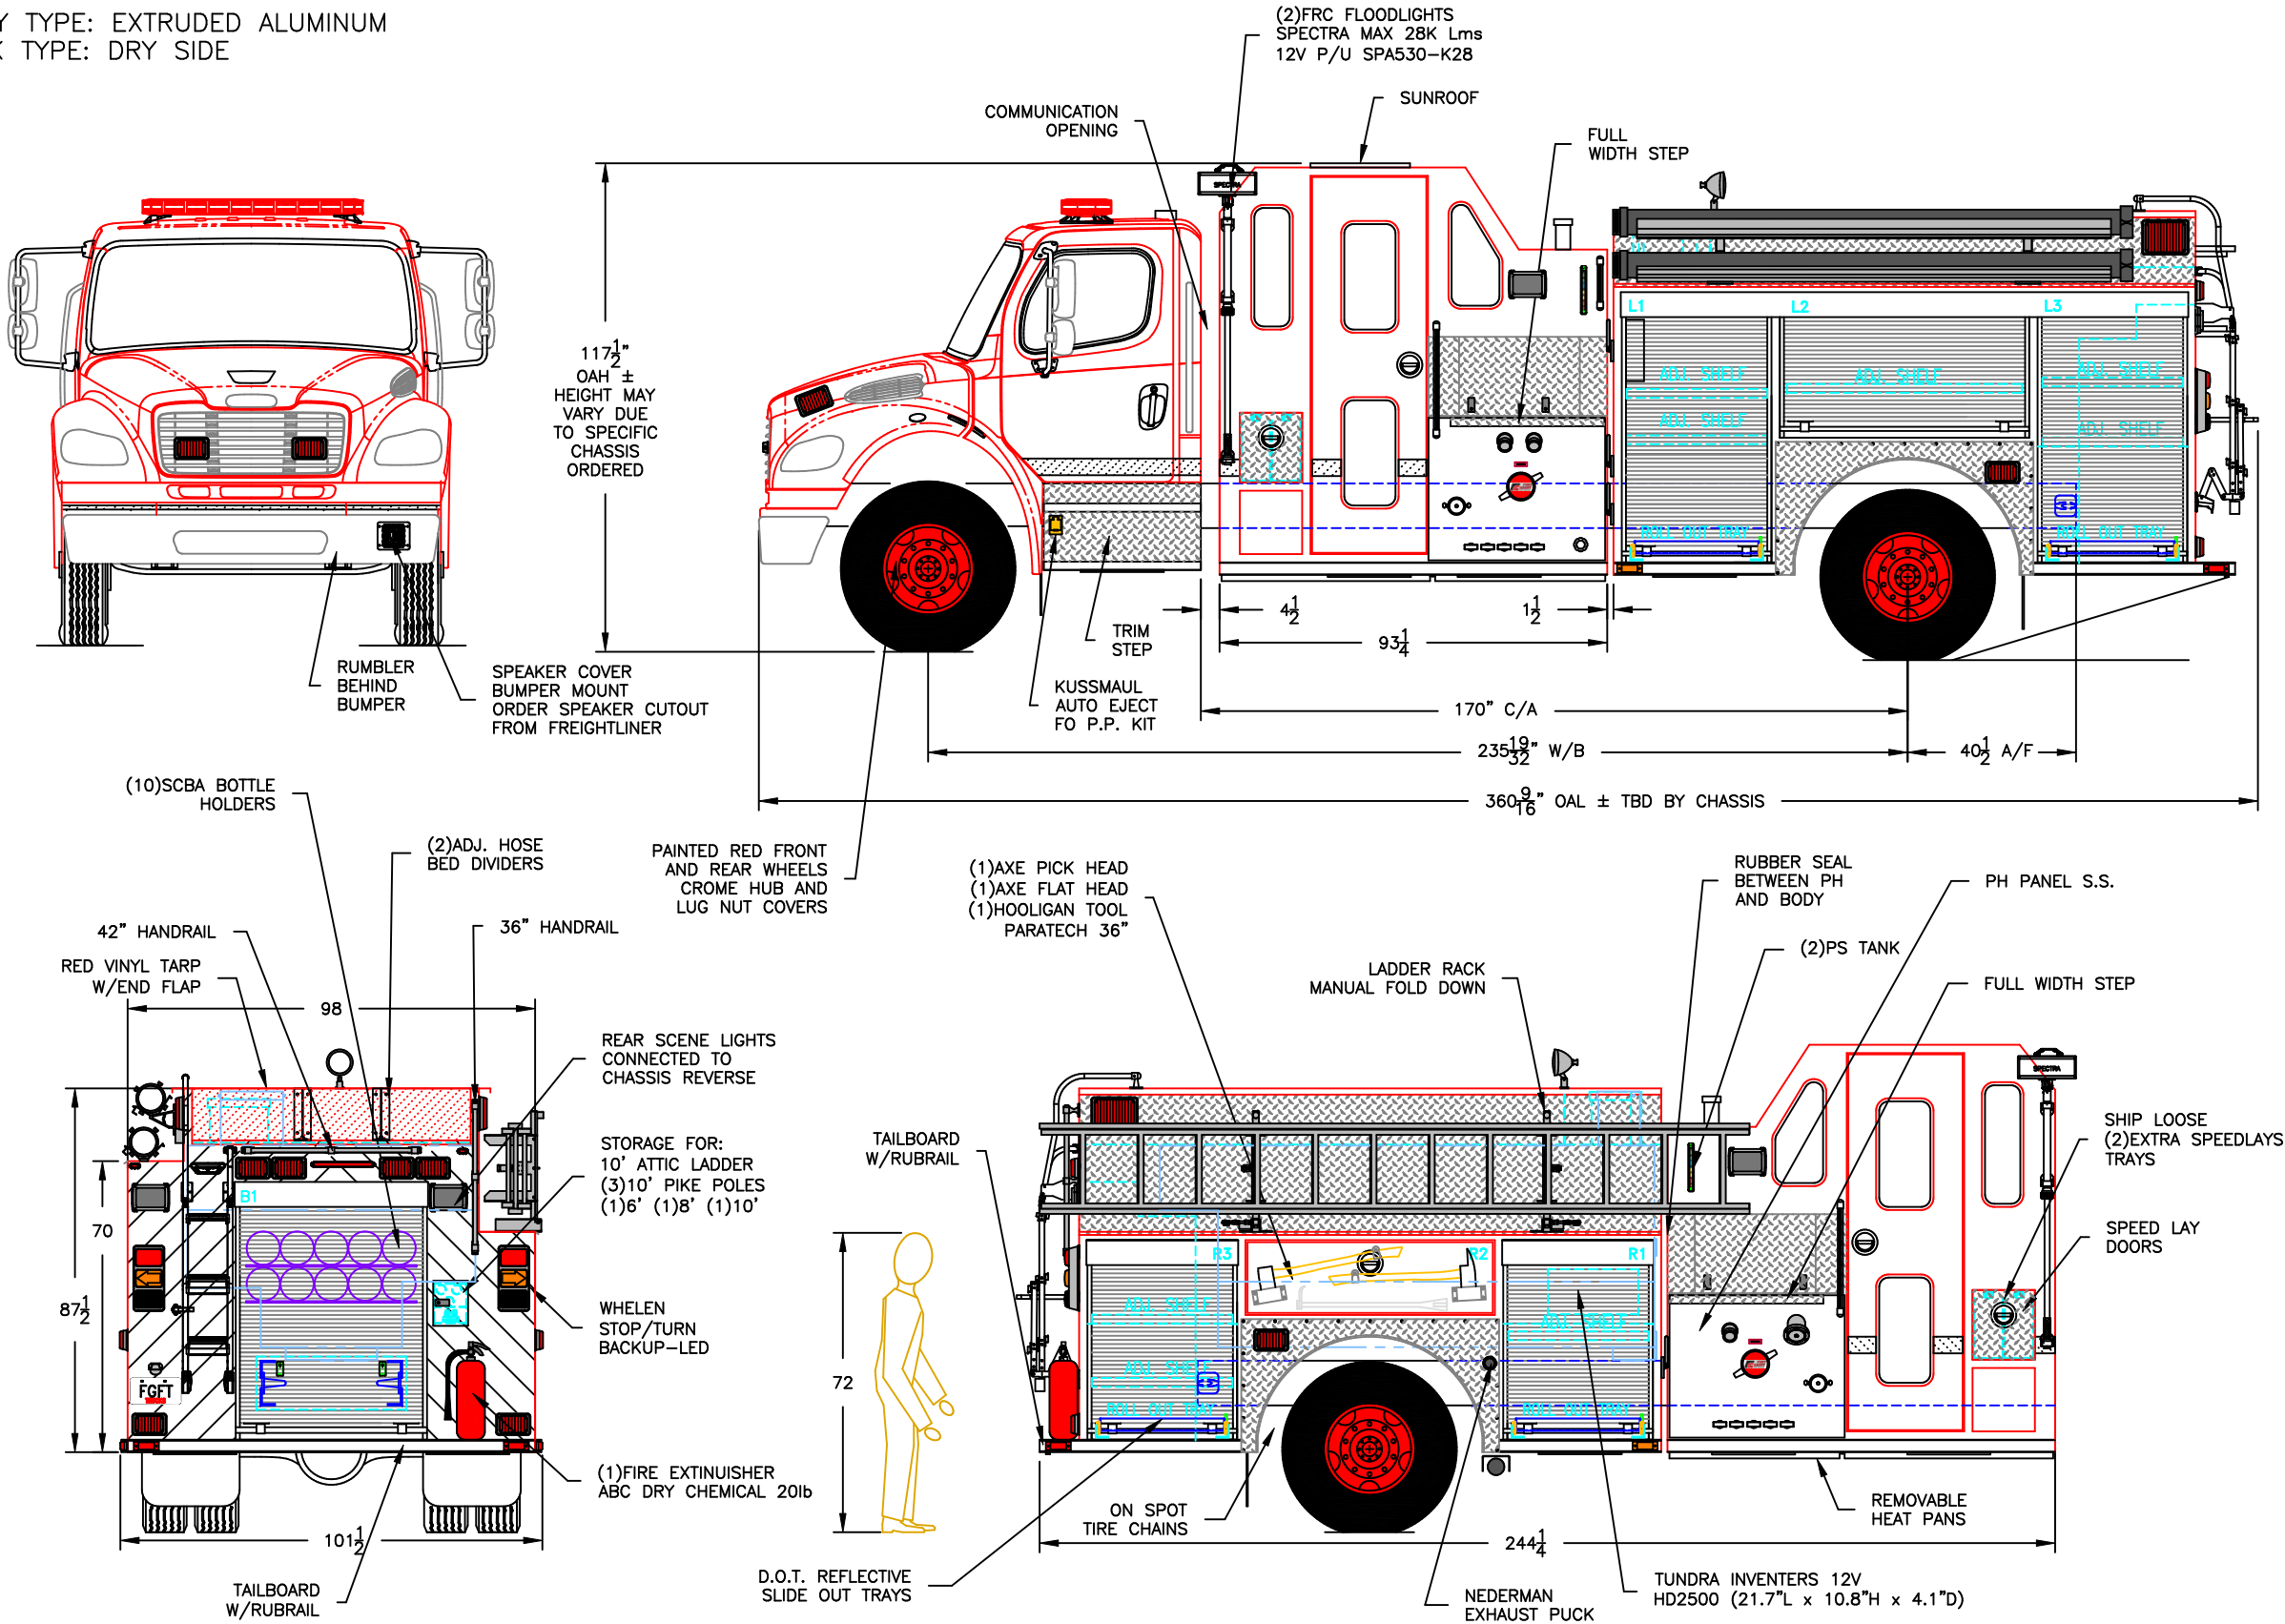

B	CUSTOMER SIGN OFF DRAWING	TV	08 MAR 2016
A	CRM DRAWING	TV	08 MAR 2016
REV	DESCRIPTION OF CHANGE	BY	DATE



WWW.FGFT.COM
WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION:
MAYO FIRE DEPARTMENT

SCALE: 1:45

DWG. BY: TV

CHK. BY:

MODEL: AME310D5

SHEET: 1 OF 1

DWG. NO. : M0765

DATE: 19 JAN 2016