

BODY TYPE: EXTRUDED ALUMINUM
TANK TYPE: DRY SIDE

DOC. NO. : E018-1 DRAWING TEMPLATE
REV. B 2008/01/09

SPECIFICATION

CHASSIS:
-FREIGHTLINER M2 106, REGULAR CAB
-36,000 LB GVWR; 12,000 LB FRONT / 24,000 LB REAR
-DIESEL ENGINE, CUMMINS ISL, 330 HP
-AUTOMATIC TRANSMISSION, ALLISON 3000 EVS

PUMP:
-HALE MIDSHIP QMAX XS 1500GPM SMART CAFS
-1500 USGPM (5678 LPM) (1250 IGPM) AT 150 PSI
-NFPA TEST AND CERTIFICATION TO NFPA 1901-2016 EDITION

PLUMBING: STAINLESS STEEL SCHEDULE 10
-2 x 6" SUCTION, (1)ROAD (1)CURB, BOTH ELECTRIC (MIV)
-1 x 2 1/2" GATED SUCTION, (1)ROAD
-2 x 2 1/2" DISCHARGE, (1)ROAD (1)CURB
-2 x 2 1/2" DISCHARGE, (2)REAR - SMART CAFS
-1 x 3" MONITOR STAND PIPE
-2 x 1" HOSE REEL OPERATED
-1 x 3" NH DISCHARGE W/3" PLUMBING
-4" TANK TO PUMP, W/4" BUTTERFLY VALVE MANUAL
-2" TANK FILL

TANK:
-1000 USG (835 IG) WATER TANK POLY
-30 USG (25 IG) SINGLE INTERNAL FOAM TANK

BODY:
-ER NO STANCHIONS ALUMINUM HIGH/HIGH
-BODY UNDERCOATING - CORASHIELD



EMERGENCY EQUIPMENT-ACCESSORIES:
-LIGHT BAR 56" LED
-SIREN
-200W SPEAKER
-2 x FLOOD LIGHTS
-1 x HAND HELD SPOT LIGHT IN CAB
-2 x GRILLE LIGHTS RED
-2 x SIDE UPPER WARNING LIGHTS RED
-6 x SIDE LOWER WARNING LIGHTS RED
-2 x REAR UPPER WARNING LIGHTS RED
-2 x REAR LOWER WARNING LIGHTS RED
-8 x GROUND LIGHTS
-1 x TRAFFIC ADVISOR
-6 x SCENE LIGHTS
-AIR CHARGING PROVISION
-BATTERY CHARGING PROVISION
-ANTENNA MOUNT
-10' FOLDING LADDER
-14' ROOF LADDER
-24' EXTENSION LADDER
-(2) 6" x 10' SUCTION HOSE
-(1) 6" x BARREL STRAINER KOCHEK

MODEL:
WHELEN JUSTICE 56"
FEDERAL EQ2B
FEDERAL BP200-EF
UNITY AG-S P46WLC LED
COLLINS
WHELEN 600 LED
WHELEN 900 LED
WHELEN 600 LED
WHELEN 900 LED
WHELEN 600 LED
LUMA BAR H20-12"
WHELEN TAL65 LED
FRC LED900-Q70
KUSSMAUL PUMP
PLUS 1200
DUO-SAFETY 585-A
DUO-SAFETY 775-A
DUO-SAFETY 900-A

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1	48.25W x 69H x 27D
L2	62.25W x 40H x 27D
L3	48.25W x 69H x 27D
R1	48.25W x 69H x 15/27D
R2	44W x 40H x 15D
R3	48.25W x 69H x 15/27D
B1	44W x 54H x 30D

DOOR OPENING/COMPARTMENT SIZE:
ROLLUP DOORS
DOOR OPENING IS REDUCED 10" IN HEIGHT AND 2" IN WIDTH AND 2" IN DEPTH.

PUMP RATING & TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. ACTUAL VALUES MAY VARY.
CHASSIS GVWR IS MINIMUM REQUIRED FOR STANDARD BODY. DEPENDING ON OPTIONS GVWR MAY INCREASE
OEM CAB STEPS MAY NOT MEET NFPA STANDARDS. SELECT CUSTOM STEPS IF REQUIRED.
DRAWING MAY NOT BE EXACT, SEE QUOTE FOR DETAILS.

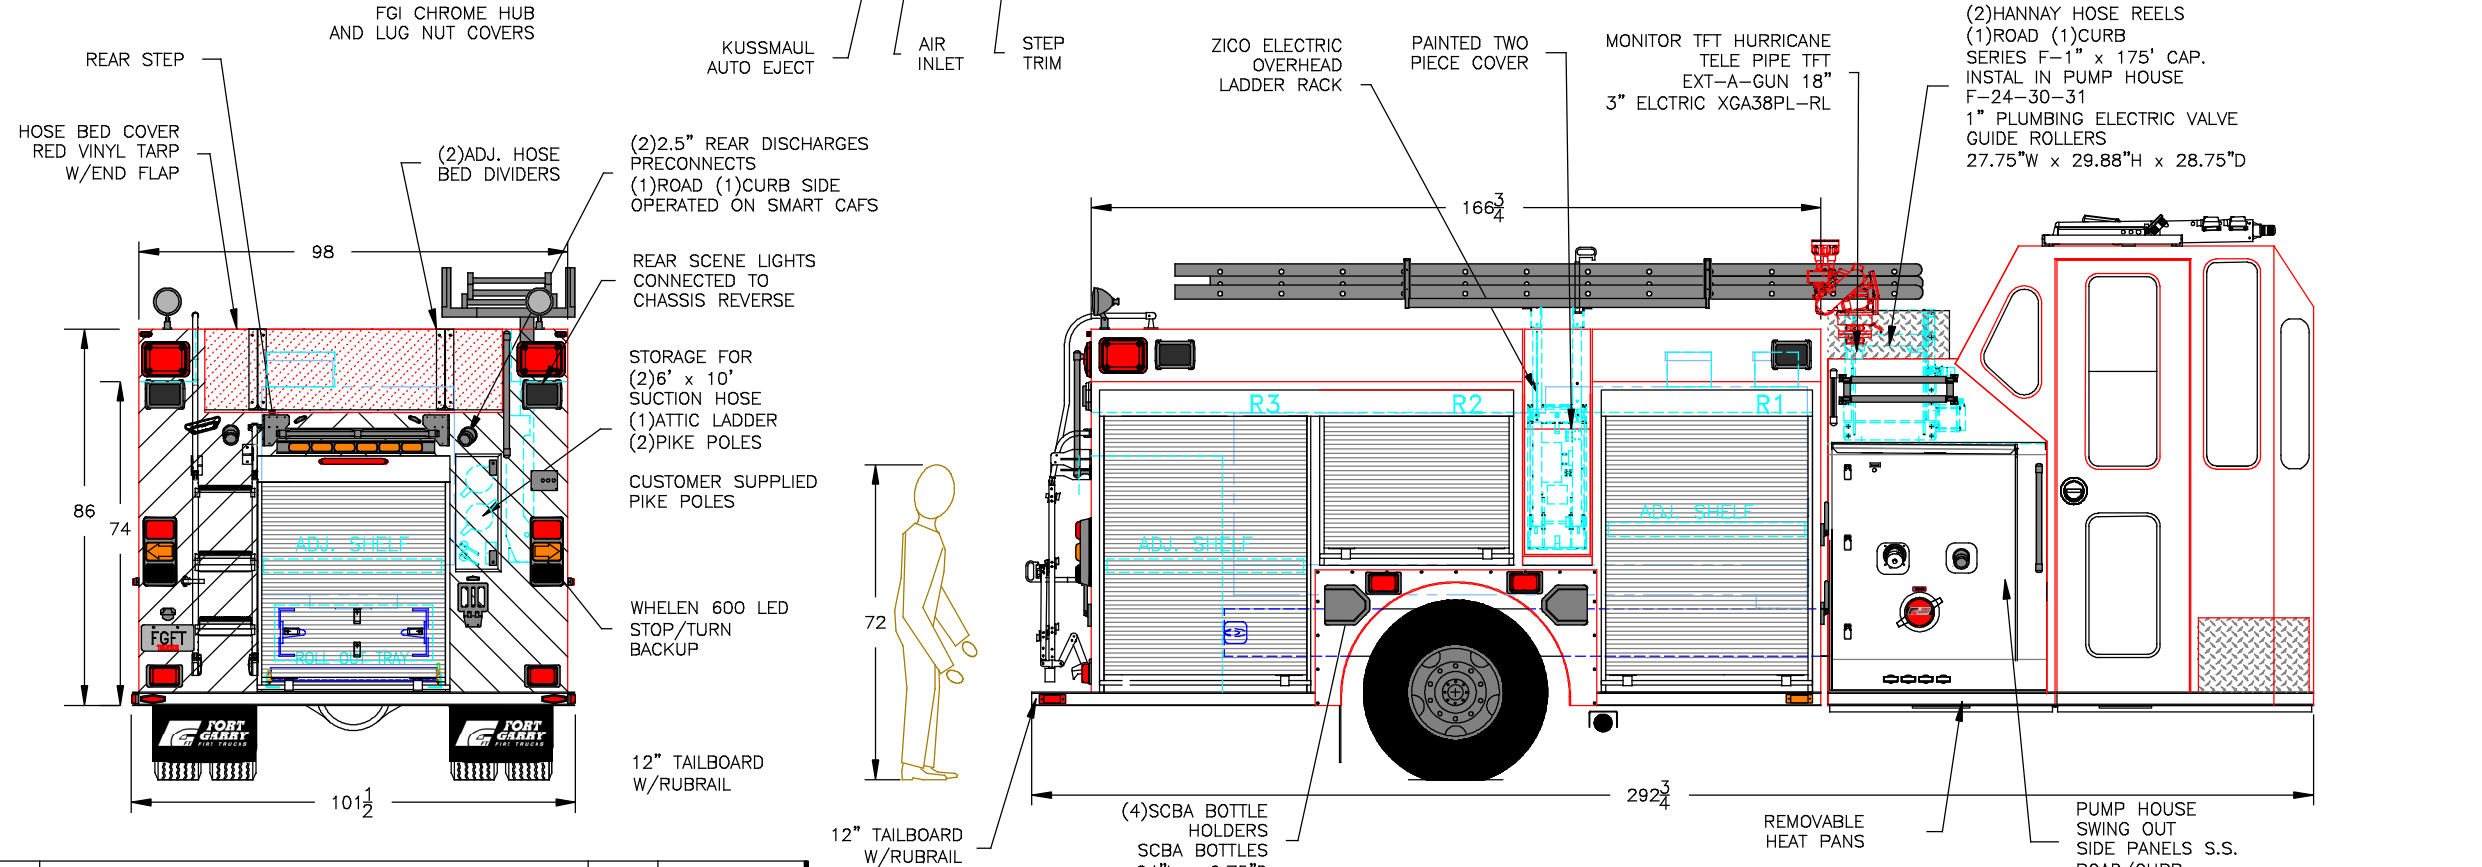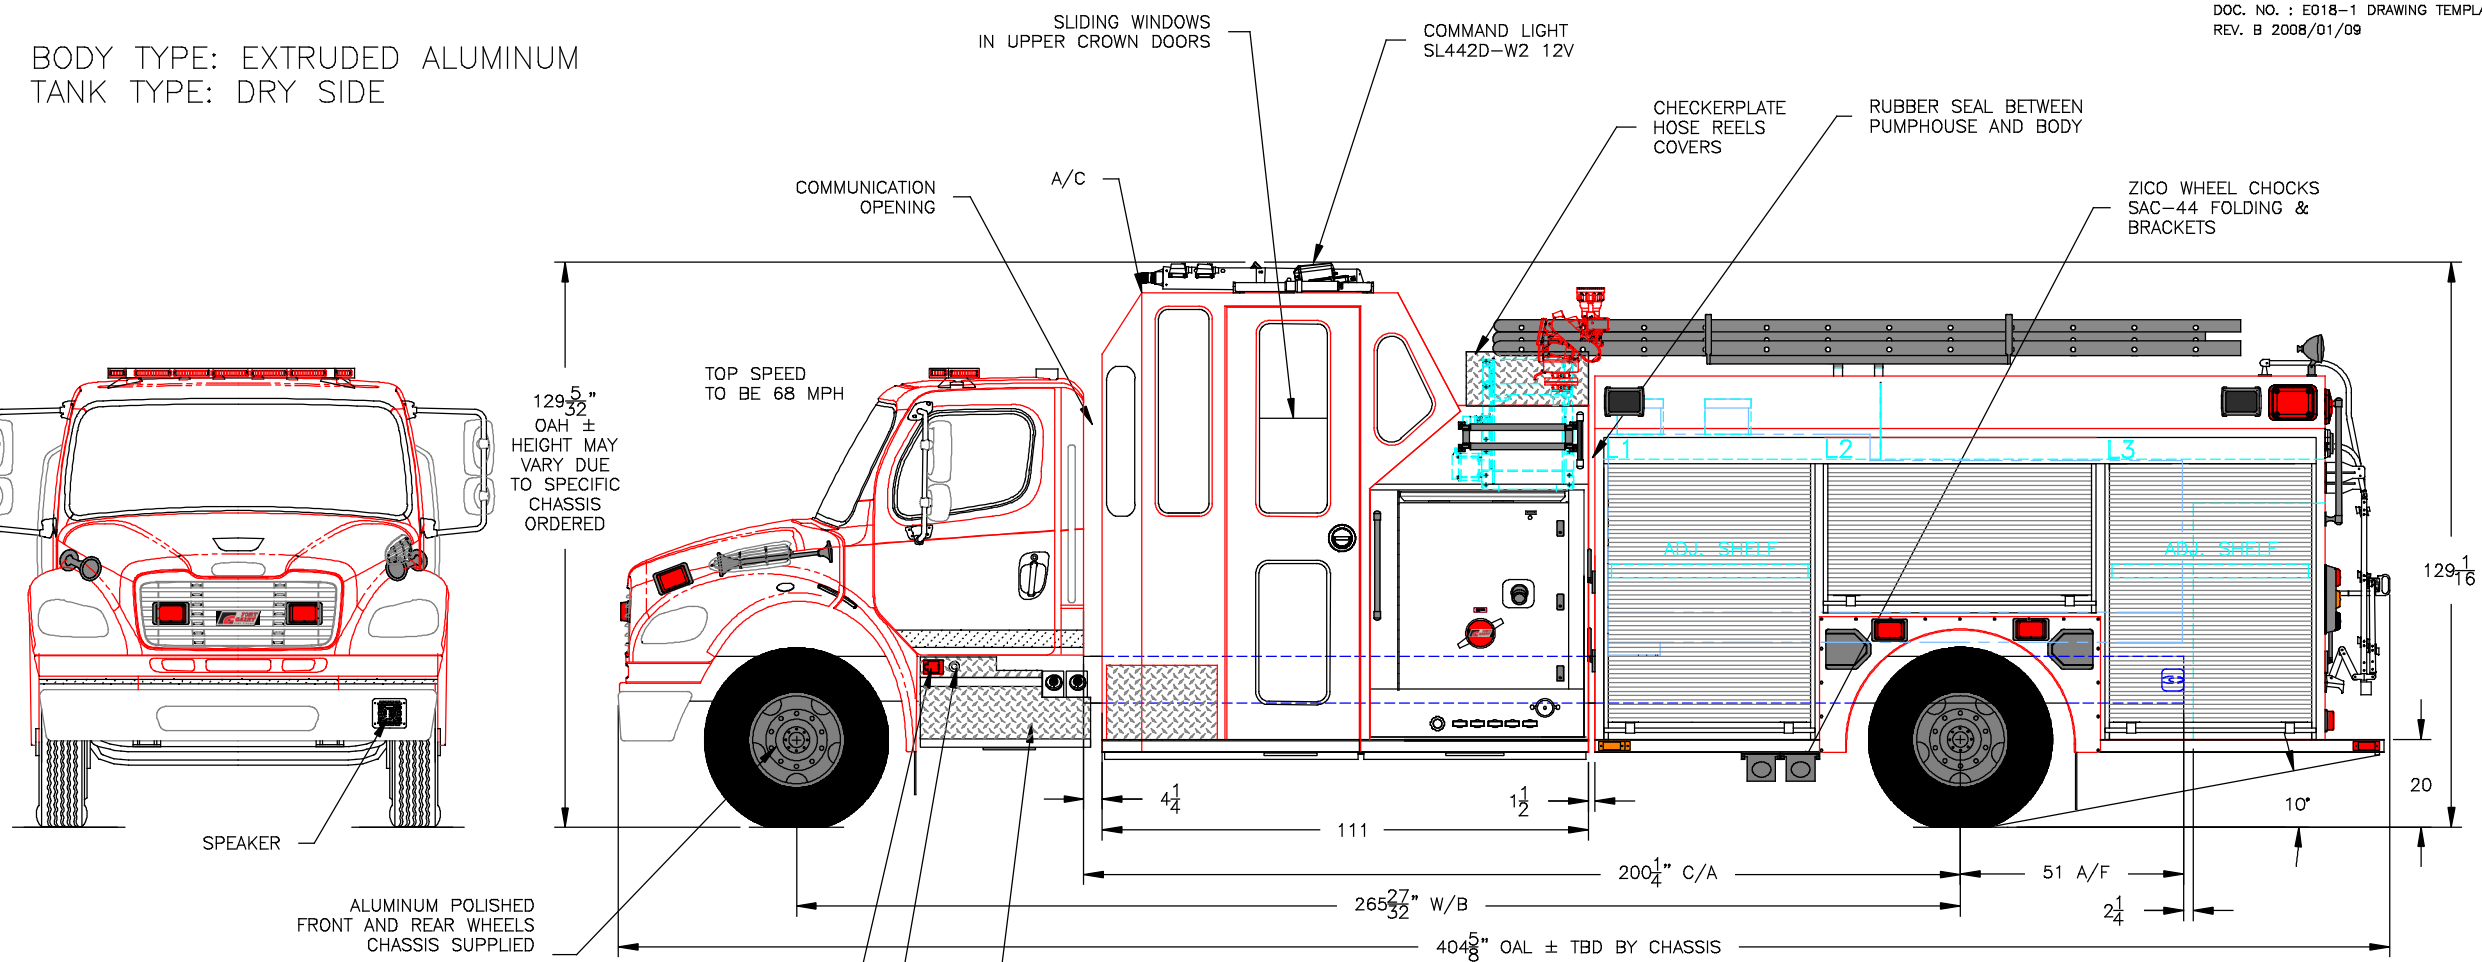

REV	DESCRIPTION OF CHANGE	BY	DATE
D	REVISED CUSTOMER SIGN OFF DWG	JAR	10 MAR 2017
C	PPM DRAWING	TV	15 FEB 2017
B	CUSTOMER SIGN OFF DRAWING	TV	18 JAN 2017
A	CRM DRAWING	JAR	17 OCT 2016

FORT GARRY
FIRE TRUCKS
WWW.FGFT.COM
WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION:	ELBOW LAKE F.D.	
SCALE:	DWG. BY:	CHK. BY:
1:45	TV	

MODEL:	SHEET:
ERE408H6C	1 OF 1
DATE:	DWG. NO. :
28 JUN 2016	M0796