

**CUSTOMER APPROVAL**  
 IF NOT RETURNED TO FGFT BY THE DATE INDICATED BELOW,  
 WE WILL PROCEED WITH FABRICATION AS PER THE DRAWING

**SALES SIGNATURE:**

**CUSTOMER SIGNATURE:**

**DATE:**

**RETURN TO FGFT BY:** DATE: DEC. 18, 2018

**REVIEWED BY:**

**REVIEW DATE:**

ACCEPTED AS IS:

ACCEPTED WITH REVISION NOTED:

REVISE AS NOTED AND RE-SUBMIT:

BODY TYPE: FORMED ALUMINUM  
 TANK TYPE: DRY SIDE

DOC. NO. : E018-1 DRAWING TEMPLATE  
 REV. C 2017-02-05

**SPECIFICATION**

**CHASSIS:**  
 -FREIGHTLINER M2 112 CREW CAB, 4x2  
 -40,600 LB GVWR; 14,600 LB FRONT / 26,000 LB REAR  
 -DIESEL ENGINE, MBE 4000, 12.8L, 410 HP  
 -AUTOMATIC TRANSMISSION, ALLISON 4000 EVS

**PUMP:**  
 -HALE MIDSHIP DSD 1250 MIDSHIP  
 -1250 USGPM (5000 LPM) (1050 IGPM) AT 150 PSI  
 -THIRD PARTY CERTIFICATION MEETING NFPA 1901-2016 EDITION



**PLUMBING: STAINLESS STEEL SCHEDULE 10**  
 -2 x 6" SUCTION, (1)ROAD (1)CURB  
 -2 x 2 1/2" GATED SUCTION, (1)ROAD (1)CURB  
 -5 x 2 1/2" DISCHARGE PORT, (2)ROAD (2)CURB (1)REAR  
 -2 x 1 1/2" CROSS LAY'S  
 -1 x 3" MONITOR STAND PIPE  
 -4" TANK TO PUMP, 3" BUTTERFLY VALVE  
 -2" TANK FILL

**TANK:**  
 -1000 USG (3780 L) POLY

**BODY:**  
 -CRUSADER FLAT BACK ALUMINUM HIGH/LOW

**EMERGENCY EQUIPMENT-ACCESSORIES:**  
 -LIGHT BAR 56" LED  
 -SIREN  
 -2 x 100W SPEAKER  
 -2 x FLOOD LIGHTS  
 -2 x GRILLE LIGHTS RED  
 -4 x SIDE WARNING LIGHTS RED  
 -2 x SIDE UPPER WARNING LIGHTS  
 -2 x REAR LOWER WARNING LIGHTS RED  
 -2 x REAR UPPER WARNING LIGHTS RED  
 -8 x GROUND LIGHTS  
 -1 x TRAFFIC ADVISOR  
 -AIR CHARGING PROVISION  
 -BATTERY CHARGING PROVISION  
 -10' ATTIC LADDER  
 -12' ROOF LADDER  
 -24' (2)SECTION EXTENSION LADDER  
 -(1) 6" BARREL STRAINER KOCHEK  
 -(2) 6" x 10' SOFT RUBBER SUCTION HOSE

**MODEL:**  
 WHELEN JUSTICE 56"  
 WHELEN 295SLSA1  
 WHELEN SA315P  
 UNITY AG-2  
 WHELEN 600 LED  
 WHELEN 600 LED  
 WHELEN 600 LED  
 WHELEN 600 LED  
 WHELEN 900 LED  
 LUMA BAR H20-12"  
 WHELEN TAL65 LED  
 KUSSMAUL PUMP  
 PLUS 1000  
 DUO SAFETY 585-A  
 DUO SAFETY 775-A  
 DUO SAFETY 900-A  
 FIREQUIP

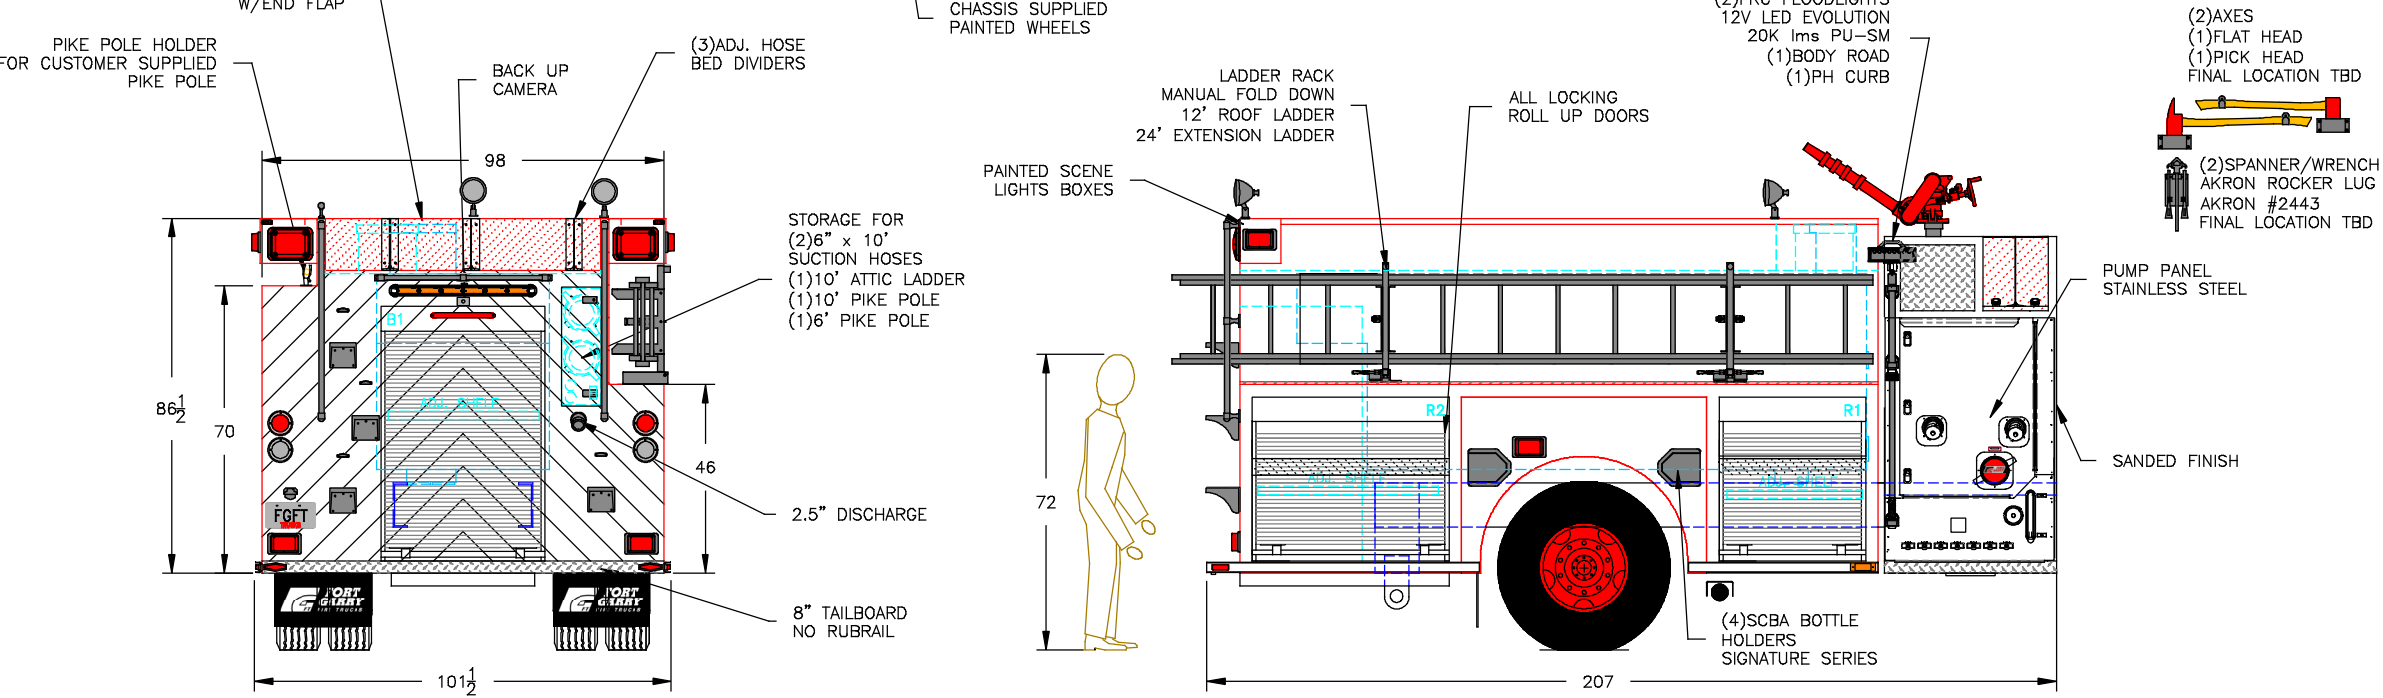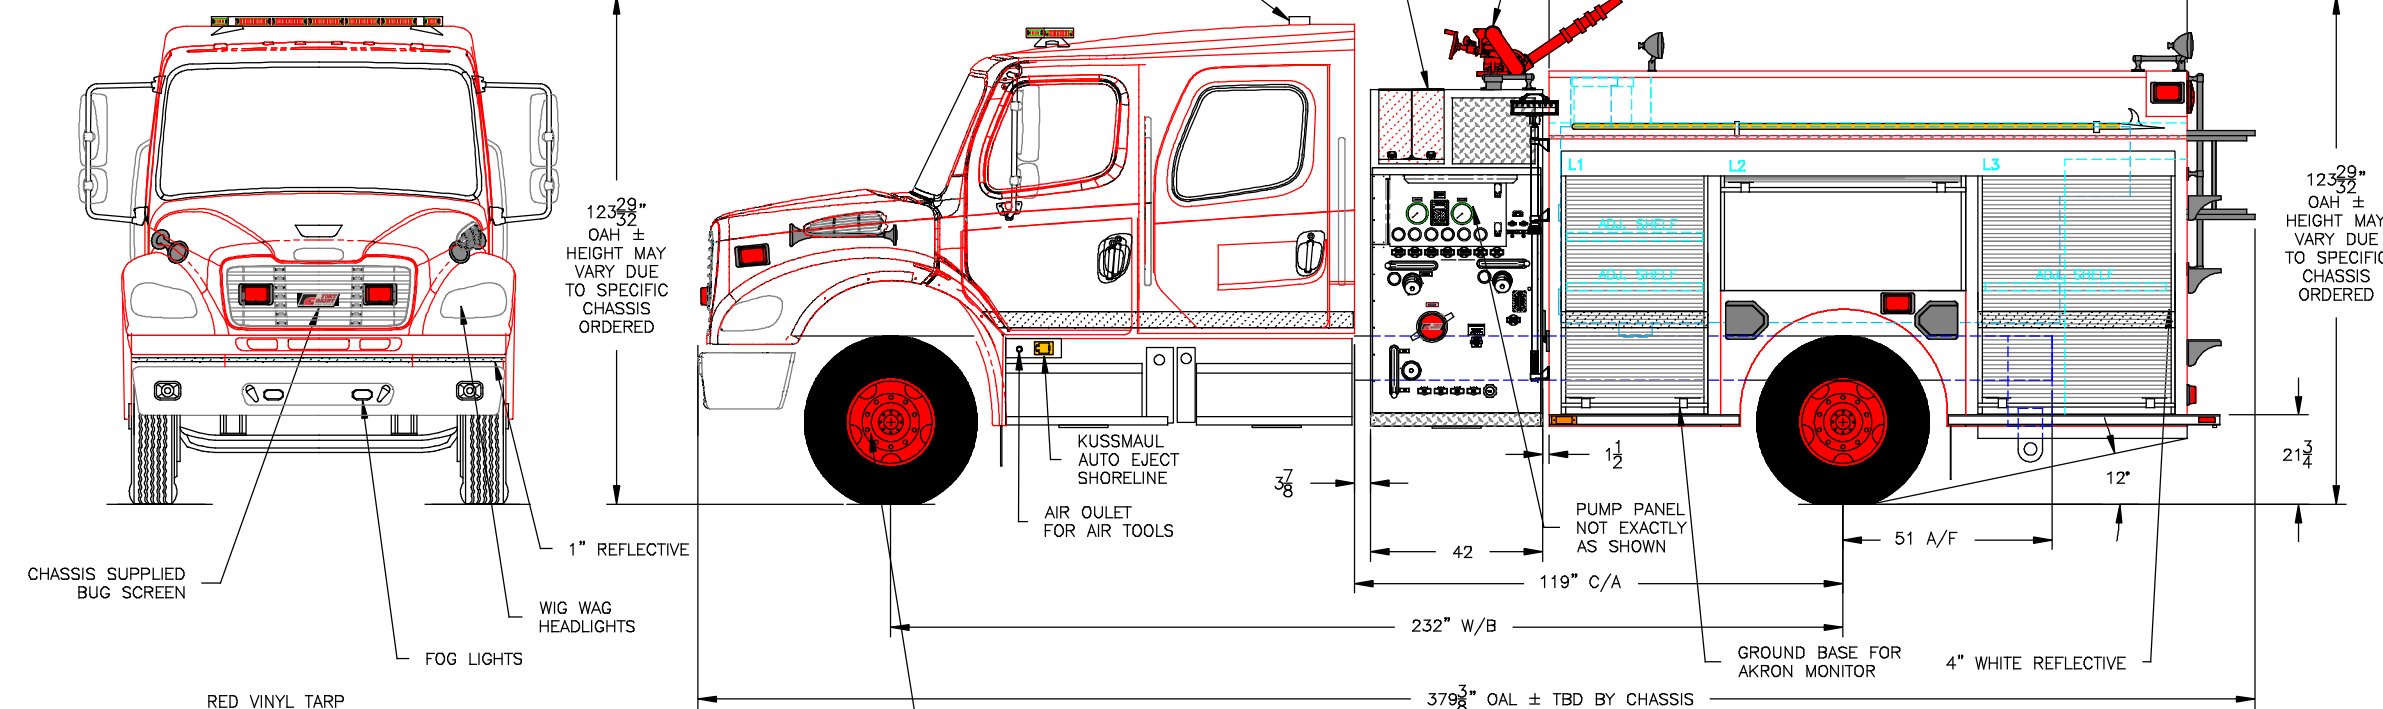

THIS DRAWING IS PROPERTY OF FORT GARRY FIRE TRUCKS LTD (FGFT) AND MUST NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, BY ANY METHOD WHATSOEVER, WITHOUT AUTHORIZATION OF FGFT.

COMPT.	COMPARTMENT FRAME DIMENSIONS
L1	36W x 65H x 26D
L2	60W x 35H x 26D
L3	48.25W x 65H x 26D
R1	36W x 40H x 26D
R2	48.25W x 40H x 26D
B1	40W x 62H x 30D

**NOTES:**

- THE DRAWING IS FOR REFERENCE PURPOSE, ONLY. THE DRAWING MAY OR MAY NOT SHOW ALL ITEMS AS DESCRIBED IN THE WRITTEN DETAILED SPECIFICATION.
- INCLUSION OF AN ITEM ON THE DRAWING DOES NOT CONSTITUTE INCLUSION OF THAT ITEM WITH THE FINAL DELIVERY OF THE UNIT. SPECIFICATION SHALL BE FINAL AUTHORITY TO BE DETERMINED WHAT IS SUPPLIED ON THE APPARATUS.
- THE EFFECTIVE DOOR OPENING FOR ROLLUP DOORS WILL BE REDUCED APPROX. 10" IN HEIGHT, 2" IN DEPTH AND 2" IN WIDTH FROM SHOWN FRAME OPENINGS AND 2" IN HEIGHT, 3" IN DEPTH AND UP TO 4" IN WIDTH FOR PAN DOORS. DIMENSIONS TOLERANCE ± 1/4"
- PUMP RATING AND TANK CAPACITY ARE SHOWN AS NOMINAL VALUES. THE ACTUAL VALUES MAY VARY.
- CHASSIS GVWR SHOWN IS THE MINIMUM REQUIRED FOR STANDARD BODY DEPENDING OF OPTIONS, GVWR MAY NEED TO BE INCREASED.
- COMMERCIAL OEM CAB STEPS MAY NOT MEET ULG STANDARD. SELECT CUSTOM STEPS WHEN REQUIRED
- OVERALL HEIGHT IS IN LOADED CONDITION, UNLOADED HEIGHT MAY BE 4" ABOVE HEIGHT SHOWN. AFTER TRUCK IS COMPLETED ADDITIONAL STEPS MAY BE REQUIRED TO MEET THE STANDARD.
- DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO CHANGE AS MAY BE FOUND NECESSARY DURING DESIGN. DO NOT SCALE DRAWING.
- MINOR DETAILS AND REFLECTIVE STRIPING ARE NOT SHOWN.

REV	DESCRIPTION OF CHANGE	BY	DATE
D	REVISED CUSTOMER SIGN OFF DWG	JAR	04 DEC 2018
C	PPM DRAWING	JAR	08 NOV 2018
B	CUSTOMER SIGN OFF DRAWING	TV	04 OCT 2018
A	CRM DRAWING		

**FORT GARRY**  
**FIRE TRUCKS**  
 WWW.FGFT.COM  
 WINNIPEG, MANITOBA, CANADA 1-800-565-3473

DESCRIPTION: **BOMBEROS DE EL SALVADOR**

SCALE: 1:48

DWG. BY: JAR

CHK. BY:

MODEL: CPS08H5

DATE: 09 NOV 2017

SHEET: 1 OF 1

DWG. NO. : M0951-M0952